

ULTRA-PREMIUM EXTERIOR PAINTS

EVERSHIELD®

The Ultimate in Exterior Protection




EVERSHIELD

EVERSHIELD paints are ultra-premium exterior, ultra-low VOC, 100% acrylic coatings that provide maximum protection against UV color fade, dirt pick-up, mildew, efflorescence, water intrusion and film failure (grain-cracking, peeling, blistering).

Why EVERSHIELD paints outperform the competition

- :: Formulated using advanced technology and premium ingredients that provide unparalleled performance, durability, coverage and adhesion
- :: Ultimate protection against moisture penetration and UV color fade
- :: Exceptional dirt pick-up resistance
- :: Outstanding gloss retention
- :: Superior non-blocking properties

For use on these substrates

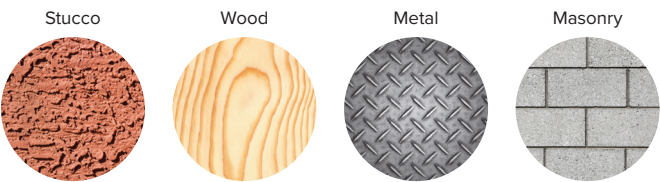

	Flat	Velvet	Eggshell	Satin/ Low Sheen	Semi-Gloss	Gloss
Stucco	•	•	•			
Masonry & Brick	•	•	•			
Wood Siding	•	•	•			
Aluminum	•	•	•			
Vinyl Siding	•	•	•			
Soffit, Fascia & Eaves	•	•	•	•	•	•
Garage Doors & Gutters	•	•	•	•	•	•
Gates & Fences				•	•	•
Doors, Windows & Shutters				•	•	•

These are commonly used gloss levels for surfaces listed above. Gloss may be affected by texture, porosity of the surface and atmospheric conditions. Please contact a Dunn-Edwards representative or your local store for specific product availability.





Unparalleled alkali burnout resistance

EVERSHIELD paints resist blotching and fading, which can occur on new masonry surfaces.




EVERSHIELD Flat Regional Brand National Brand

Alkali burnout occurs when high alkalinity ($\text{pH} > 7$) breaks down the resin, which deteriorates the paint film.

Superior block resistance

EVERSHIELD paints do not stick or peel.

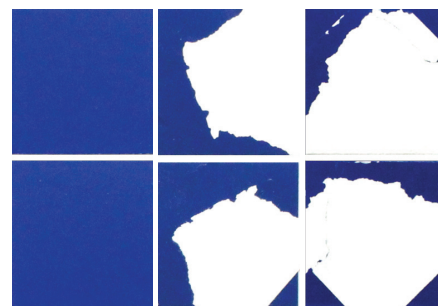


EVERSHIELD Semi-Gloss National Brand 1 National Brand 2

Block resistance is the ability of a dried paint film to resist sticking to another painted surface when pressed together, such as doors and doorjamb.

Industry-leading surfactant leaching resistance

EVERSHIELD paints effectively fight surfactant leaching with no glossy, soapy or sticky residue.

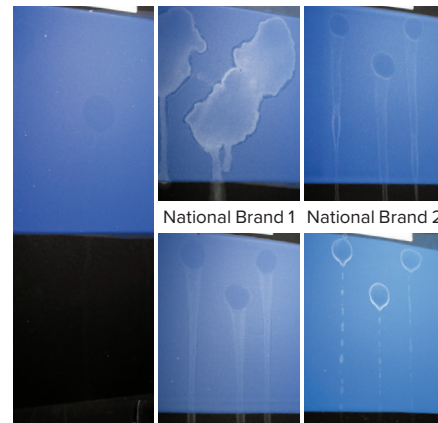

EVERSHIELD Flat National Brand 3 National Brand 4

Surfactant leaching occurs when water-soluble components (surfactants) migrate to the surface when exposed to moisture or high humidity, causing streaking and discoloration.

All test examples are high resolution photographs of the actual test results. The tests were conducted by Dunn-Edwards Laboratories and can be viewed at the corporate office by appointment.

PROTECT WHAT MATTERS

The success of your projects depends on the performance and durability of the products you use. Safeguard your work with coatings engineered to last. You'll be doing your part to protect the planet, too. Made in the world's first and only LEED® Gold-certified paint manufacturing facility, Dunn-Edwards products meet or exceed most environmental standards.



'LEED' and related logo is a trademark owned by the U.S. Green Building Council and is used with permission.



Products bearing this logo are EG-FREE™ and TAC/HAP-FREE. Ethylene glycol (EG), a solvent often used in water-based paints, is listed as a Toxic Air Contaminant (TAC) and Hazardous Air Pollutant (HAP). In 1983, Dunn-Edwards was the first in the industry to voluntarily replace EG with propylene glycol, a nontoxic alternative "generally regarded as safe" by the FDA. Also, every Dunn-Edwards product with the EG-FREE logo is formulated without any other TAC or HAP.

A GREEN LEGACY, A GREENER FUTURE.

Dunn-Edwards has a green legacy that makes us proud and inspires us to do more. We are firmly dedicated to the principle of eco-efficiency, which we define as the ability to satisfy human needs in ways that minimize adverse impacts on energy and material resources, environmental quality, and human health and safety.

HEALTH & SAFETY when using water-based paints:

CAUTION! INHALATION OF SPRAY MIST OR SANDING DUST MAY BE HARMFUL. Use only with adequate ventilation. Avoid breathing vapors, spray mist and sanding dust. Wear a NIOSH-approved N100 filter mask (particulate type) when spraying or sanding. Avoid contact with skin and eyes. Do not ingest. Close container after use.

FIRST AID: If swallowed, immediately give 1 or 2 glasses of water to drink—for emergency information, call 1-800-222-1222. If having difficulty breathing, move to fresh air. For eye contact, immediately flush with water for 15 minutes. For skin contact, wash thoroughly with soap and water.

KEEP OUT OF REACH OF CHILDREN.

For more information, see the appropriate Product Data Sheet(s) and Safety Data Sheet(s) available at dunnedwards.com

CAUTION! Scraping or sanding surfaces of older buildings (especially pre-1978) may release dust containing lead or asbestos. EXPOSURE TO LEAD OR ASBESTOS CAN BE VERY HAZARDOUS TO YOUR HEALTH. Wear a NIOSH-approved N100 particulate filter mask to avoid breathing dust. Use a HEPA vacuum for cleanup, and finish by water-washing all surfaces. For more information, see Dunn-Edwards 'Surface Preparation Safety' guide or call U.S. EPA's lead hotline at 1-800-424-LEAD, or visit epa.gov/lead or epa.gov/asbestos—or contact your state or local Health Agency.

PHOTOGRAPHS: Paint colors depicted in the photographs in this brochure appear differently than on actual surfaces. Photographic processes and lighting will alter appearance. BACK COVER PHOTO: Walls: Warm White (DEW380) FRONT COVER PHOTO: Walls: Milk Glass (DEW358) • Trim: Weathered Brown (DEC756)



(888) DE PAINT (337-2468) | dunnedwards.com

©2024 Dunn-Edwards Corporation. All rights reserved. ESL1017 - 12M 08/24



LEARN MORE